



565 Clear Acrylic Foam Tape


High Mass clear acrylic tape with red film liner

Product description

- Foamed Acrylic Tape
- Colour: Transparent
- Soft, tacky and conformable
- Ideal for glass, window and door manufacturing

Construction

- Red PE Liner
- Acrylic adhesive
- Available in log rolls or cut to specific widths

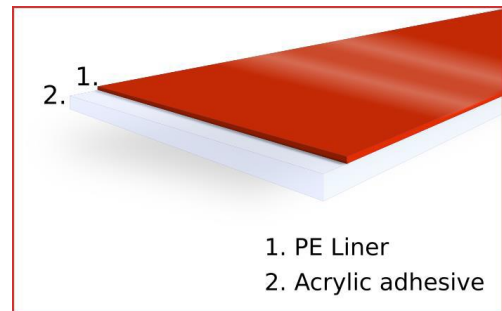

Features:

Technical Data

Item	Unit		Spec.		Test method
Thickness	mm	in	1.0	0.039	-
Density	kg/m ³	lb/ft ³	1000	62	-
180° Peel Strength	gf/25mm	lbf/in	3400	7.50	ASTM-D-3330
Tensile Strength (T-Block Test)	gf/cm ²	lbf/in ²	6000	85.34	ASTM-D-897
Dynamic Shear (after 24h)	gf/cm ²	lbf/in ²	4500	64.00	ASTM D-1002
Temperature Resistance - Short Term	°C	°F	150	302	-
Temperature Resistance - Long Term	°C	°F	90	194	-
Low Temp. Resistance	°C	°F	-40	-40	-
UV Resistance	-	-	Good	-	-

Applications: Glass industry, Point of sale, Sign industry and Plastic fabrication

Note: Unless stated otherwise all values given are average. All of the tapes in our range should be thoroughly tested on the substrates in the particular application they are intended for. William Hayes Ltd. will not be responsible for product failure unless full testing has been completed. The customer has to decide on the tape's suitability for the intended application.

William Hayes Ltd, Unit 1 Copley Valley Business Park, Sowerby Bridge, HX6 2WA

Sales Tel: 01422 833855

Email: enquiries@williamhayes.co.uk Website: www.williamhayes.co.uk